


# Verycon Compact

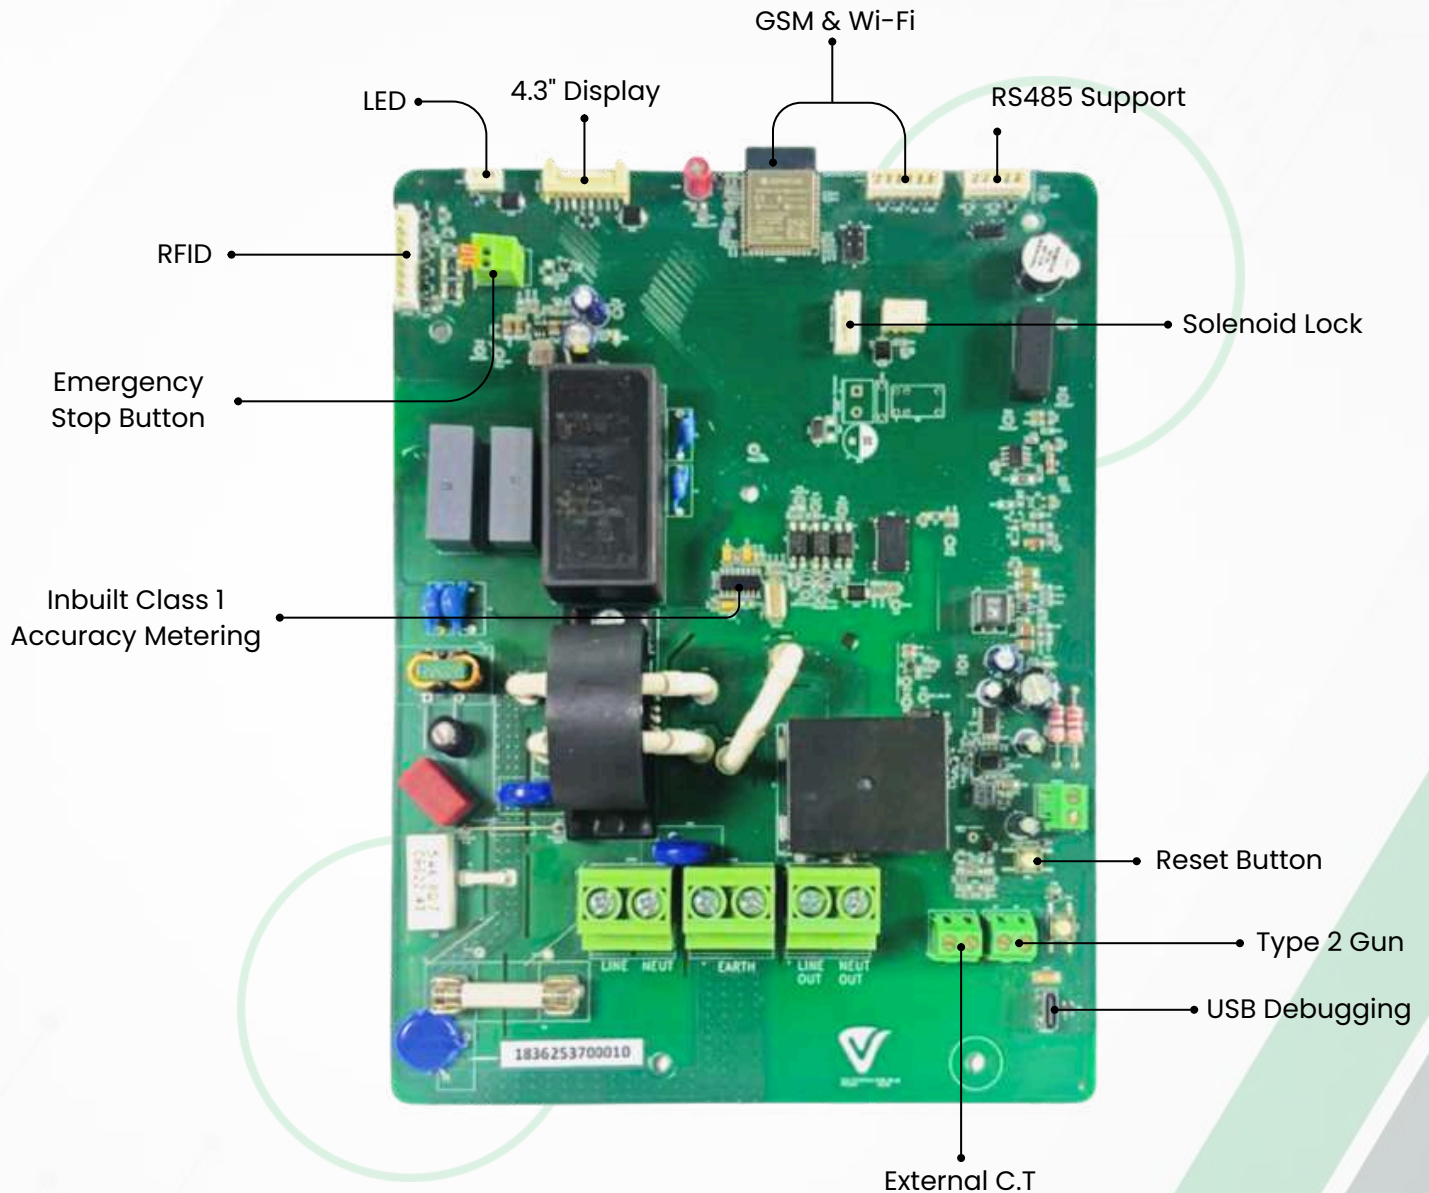

## AC Charger Output Configuration

**Total Power**

**3.3 kW**

**7.5 kW**

**Output 1**



**Output 2**



**TYPE II AC**



**IEC 60309**



**3 PIN**

# Technical Specifications

## Input Supply

|                     |                                |
|---------------------|--------------------------------|
| Input Supply        | 230 VAC $\pm$ 15% Single Phase |
| AC Input Connection | P + N + PE                     |
| Frequency           | 50 Hz                          |

## Output Power / Supply

|                      |                                  |
|----------------------|----------------------------------|
| AC Output Current    | 32 A                             |
| Maximum Output Power | 7.5 kW                           |
| No. of Connector     | 1                                |
| Connector Type       | Type 2 AC (IEC 62196-2), 3 - Pin |

## Environment

|                       |                |
|-----------------------|----------------|
| Operating Temperature | -30°C to 70° C |
| Storage Temperature   | 0°C to 70°C    |
| Humidity              | 5 to 95%       |

## User Interface and Control

|         |                        |
|---------|------------------------|
| Display | TFT 4.3" LCD supported |
|---------|------------------------|

## Electrical Parameter

|                    |                                          |
|--------------------|------------------------------------------|
| Energy Measurement | Internal Single Phase Metering Supported |
|--------------------|------------------------------------------|

## Communication

|                     |                                                            |
|---------------------|------------------------------------------------------------|
| Communication       | GSM Modem (4G LTE fall-back to 2G) and Wi-Fi               |
| Standards Supported | IEC 61851-1, IEC 61851-21-2, REACH Approved, RoHS Approved |

## Mechanical

|                               |                              |
|-------------------------------|------------------------------|
| Product Dimension (L * B * H) | 224.27 mm * 170.5 mm * 50 mm |
|-------------------------------|------------------------------|