



Verycon Pro

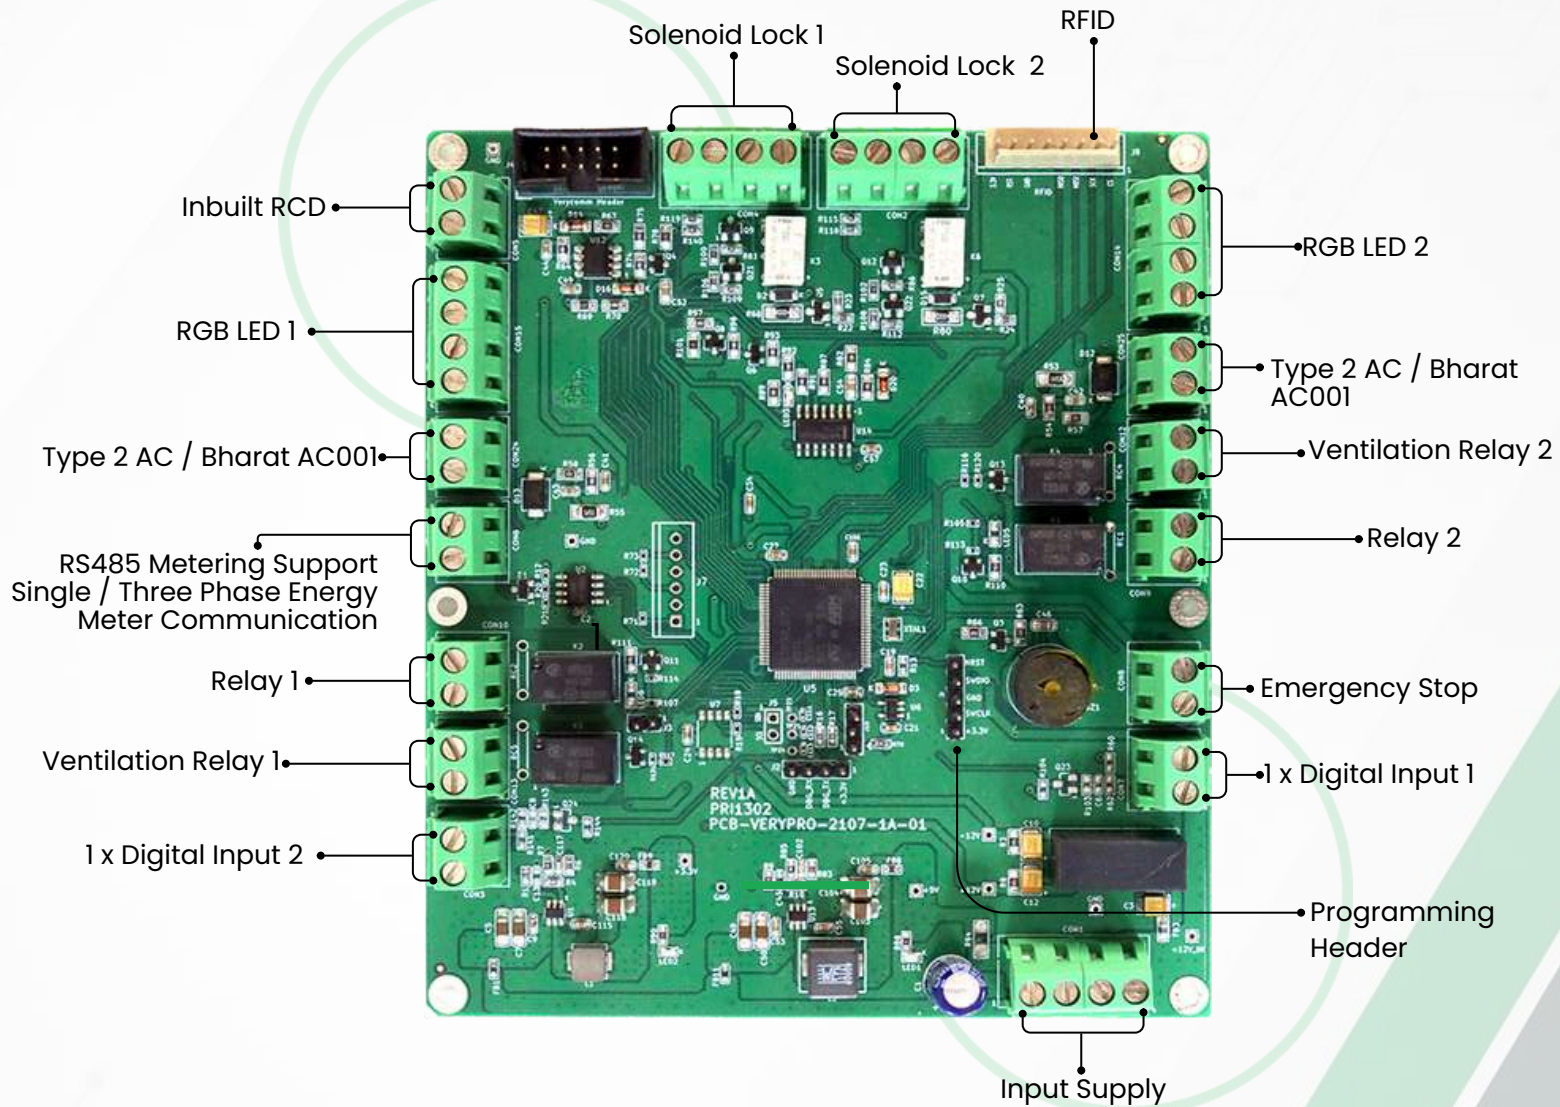

AC Charger Output Configuration

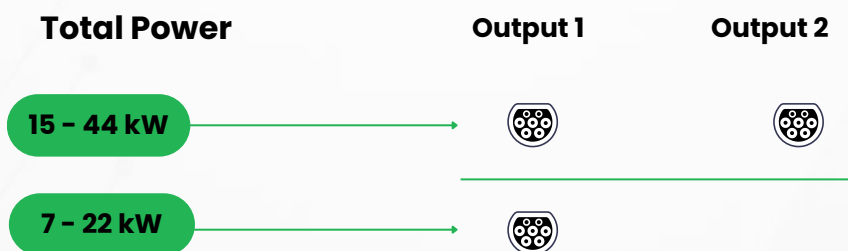

TYPE II AC

Technical Specifications

Input Supply

Operating DC power Up to 12 V, 2A

Output Power / Supply

No. of Outputs 2

Compatible Connector/ Socket Type Type 2 AC Socket

Relay Output

- x2 CP/PP interface for Type-2 dual gun
- x2 Relay output for contactor control as per IEC61851
- x2 Relay output for solenoid lock controlling
- x2 Relay output for ventilation control as per IEC61851

Current Output

- Up to 32A, Single Phase
- Up to 80A, Three Phase

User Interface and Control

Display 4.3" Graphics Display via I2C

Emergency Stop Supported

Visual Indication RGB LEDs

RFID Supported via SPI

Electrical Parameter

Energy Meter External

Battery Backup Supported

CP/PP Interface

- x2 Control Pilot Support
- x2 Proximity Pilot Support

Communication

Communication Ethernet, Wi-Fi, GSM

Protocol OCPP 1.6J

Charge Controller Standard IEC61851-22 (Mode 33)

Mechanical

Product Dimension (L*B*H) 120 mm * 136.5 mm